

Enables control of multiple DALI luminaires

Stand-alone sensor to control up to 10 DALI luminaires from one sensor. Multiple sensors can be linked using SmartScan wireless Motionline technology.

- Polycarbonate body finished white (RAL9016)
- Control the colour temperature of ColourControl luminaires (catalogue number suffixed CC)
- DALI/colour temperature control for up to 10 luminaires (assuming one DALI driver per luminaire)
- Can be used stand-alone without connected luminaires to act as a wireless booster/range extender and/or as a slave PIR to extend detection coverage
- Class II device. Earth connection provided for looping only
- Terminals suitable for 1.5 mm² looped cable
- Suitable for mounting heights up to 8 m



Up to IP65

SMARTSCAN

Specification


IP rating **Up to IP65**

Compliance

UKCA **Yes** CE **Yes**

Dimensions

Recessed version

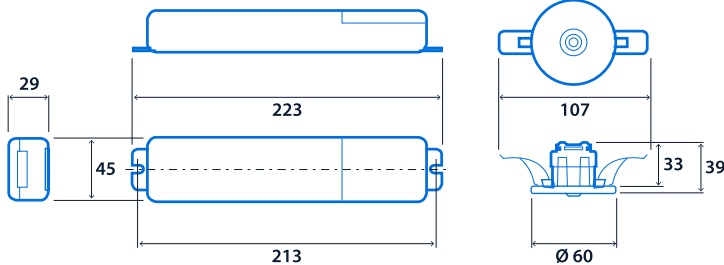


Minimum void depth (when passing controller through cut-out) - 225

Sensor connected to controller by 900mm lead

Cut-out - Ø 50

Surface version

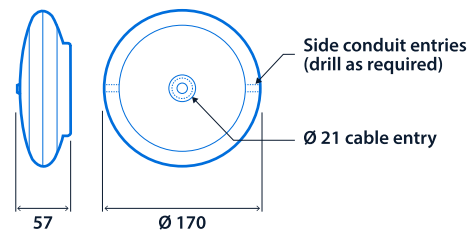

Side conduit entries (drill as required)

Ø 21 cable entry

SmartScan Stand-alone Sensor



Click or scan here
View SmartScan Stand-alone
Sensor variants using our online
filtering tool



Information is correct as of 29-Dec-2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.