## **Firefly**



# Emergency luminaires for recessed mounting with dedicated SmartScan wireless technology versions

LED emergency luminaires for recessed mounting with SmartScan wireless communication. Discreet LED emergency luminaires with superb optical performance. Three hour, non-maintained emergency operation. Eco-Power pluggable battery reduces maintenance time and cost.

Applications: open plan areas, corridors, storerooms, toilets etc.

- Small size unobtrusive
- Superb photometric performance
- Pre-fitted 3 m lead option for connection into 6-pole or SmartScan 3-pole installations
- Low standby power consumption (1.7 W total)
- Easily replaceable Nickel Metal Hydride (NiMH) ECO-Power Pack battery
- Simple to install, full status reporting SmartScan wireless communication versions



IP65 (IP40 above ceiling) / IP20 control module

0 LL/CW



Specification	

Mounting Recessed

IP rating

IP65 (IP40 above ceiling) / IP20

control module

#### **Emergency data**

Emergency lumen output Emergency duration 185 lm - 270 lm

Emergency type
Battery specification

Non-maintained

Nickel Metal Hydride (NiMH)

#### **Power**

LED power

2 W - 3 W

3 hours

Circuit power

2 W - 3 W

#### Compliance

UKCA

Yes


CE

Yes

## **Firefly**



#### **Dimensions**

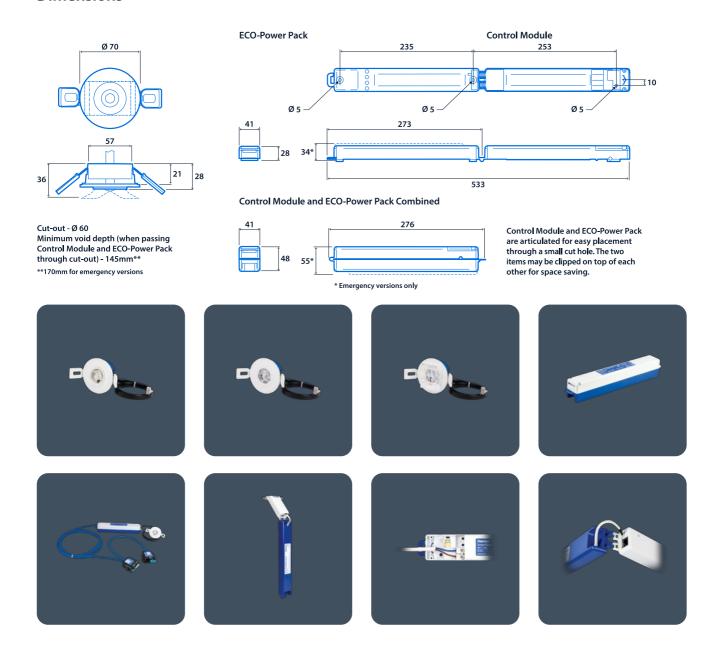

### Click or scan here

View Firefly variants using our online filtering tool



Information is correct as of 29-Dec-2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.