
## **Firefly AL**



# Anti-ligature emergency luminaires for recessed mounting with SmartScan wireless communication

Anti-ligature LED emergency luminaires for recessed mounting with SmartScan wireless communication. Secured using tamper-resistant pin Torx fixings. Discreet LED emergency luminaires with superb optical performance. Three hour, non-maintained emergency operation. Eco-Power pluggable battery reduces maintenance time and cost.

- Impact-resistant and anti-ligature
- Tamper-resistant T20 pin Torx screw fixings
- Pre-fitted 3 m lead option for connection into 6-pole or SmartScan 3-pole installations
- Low standby power consumption (1.7 W total)
- Easily replaceable Nickel Metal Hydride (NiMH) ECO-Power Pack battery
- Simple to install, full status reporting SmartScan wireless communication versions

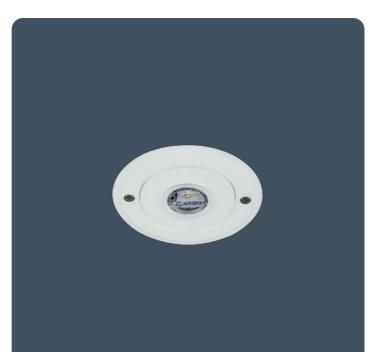

IP65 (IP40 above ceiling) / IP20 control module	0 LL/CW	<b>S M A R T</b> S C A N


#### Specification


Mounting	Recessed	IP rating	IP65 (IP40 above ceiling) / IP20 control module
Emergency data			
Emergency lumen output	265 lm - 270 lm	Emergency type	Non-maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)
Power			
LED power	2 W - 3 W	Circuit power	3 W
Compliance			
UKCA	Yes	CE	Yes

## **Firefly AL**



### Dimensions

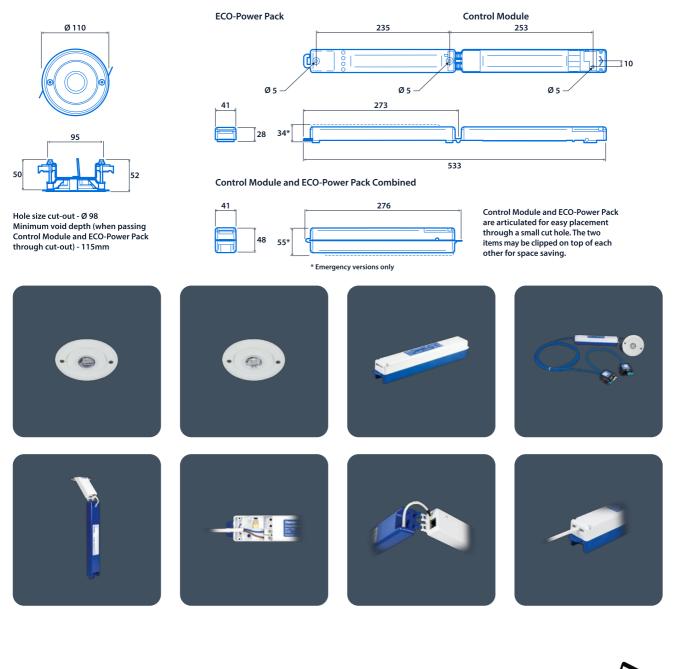



Information is correct as of 29-Dec-2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.