


### Circular recessed downlighters

Recessed luminaires with injection moulded reflector finished white. Open IP20 and frosted IP65 versions available in 14 W and 20 W.

Applications: reception areas, retail, public areas and toilets.

- Sprung suspension arms for rapid installation
- Supplied with remote gear unit fitted with 2 m lead
- Luminaires can be supplied pre-wired with a purpose made 1 m connection lead for plugging directly into the Smart Hub
- Fitted with CRI 90 LEDs with enhanced R9 value. Suitable for retail applications

Notes: CRI 80 version available to special order (minimum order quantity applies)

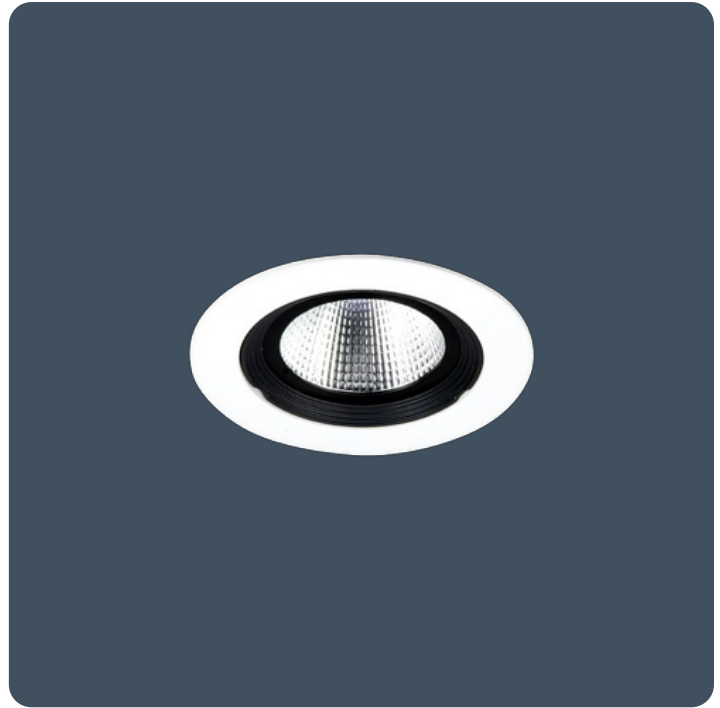

Up to IP65 (IP20 above ceiling)

Up to 91.7 LL/CW

### Specification

Mounting	Recessed	IP rating	Up to IP65 (IP20 above ceiling)
----------	----------	-----------	---------------------------------

### Lighting

Lumen output	1,270 lm - 2,110 lm	Efficacy	Up to 91.7 LL/CW
--------------	---------------------	----------	------------------

### Power

LED power	14 W - 20 W	Circuit power	17 W - 23 W
-----------	-------------	---------------	-------------

### LED characteristics


CRI	90+	Colour temperature	3000 K 4000 K
Rated life (hours)	50 K - L70/B10		

### Compliance

UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class E		


## Dimensions

### IP20 Version

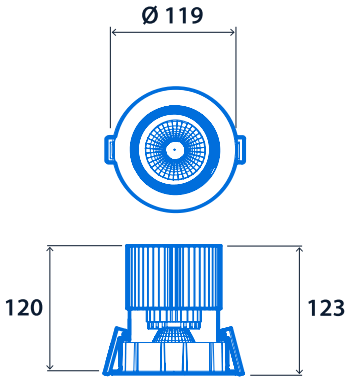


Cut-out - Ø 110  
Minimum ceiling void - 140

### IP65 Version

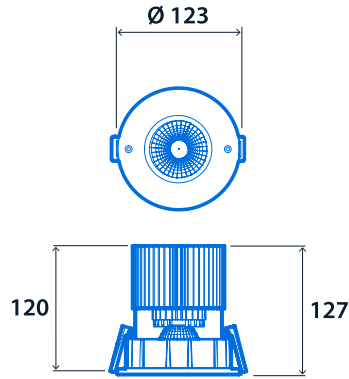

Cut-out - Ø 110  
Minimum ceiling void - 140

### Standard Remote Driver

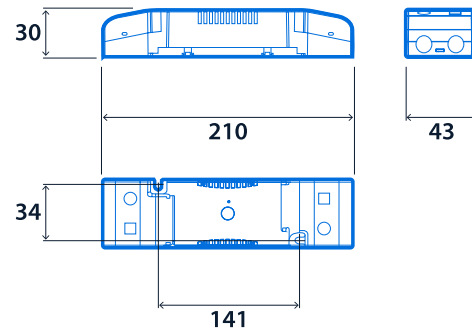

[Click or scan here](#)  
View Tego variants using our  
online filtering tool



Information is correct as of 29-Dec-2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.