Zipline Eco



Continuous LED lighting system for industrial applications

The Zipline Eco has been designed for industrial applications, with fast and flexible installation, longevity, and supreme efficiency (192.1 LL/CW).

The rolled steel trunking connects to a range of luminaire modules. These modules can be any combination of luminaire, emergency luminaire or passive infrared detector; they are designed to snap into the regularly spaced sockets on the trunking.

The Zipline Eco is a highly versatile industrial lighting system with five power options, broad, narrow, and double asymmetric light distributions and the SmartScan wireless lighting management system.

- Narrow, broad or double asymmetric distribution luminaire module options
- Raw galvanised steel trunking
- Pre-installed wiring loom, module sockets at 1500 mm intervals
- Plug and socket connections between trunking joints
- Modules click fit using stainless steel spring (requires a standard screwdriver to release)
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit

Notes: See installation guide for mounting point locations



Specification

Mounting	Surface	IP rating	IP20
Nominal size	Suspended 1500 mm module	Max presence detection height	8 m
Lighting			
Lumen output	4,400 lm - 11,060 lm	Efficacy	Up to 192.1 LL/CW
Emergency data			
Emergency lumen output	675 lm - 700 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)
Power			
LED power	22 W - 64 W	Circuit power	24 W - 67 W
LED characteristics			
CRI	80+	Colour temperature	4000 K
Rated life (hours)	100 K - L70/B10		



Zipline Eco



Compliance


UKCA Energy efficiency class


Yes CE This product contains a light source of energy efficiency class B

End kit


Dimensions


Suspension mounted version



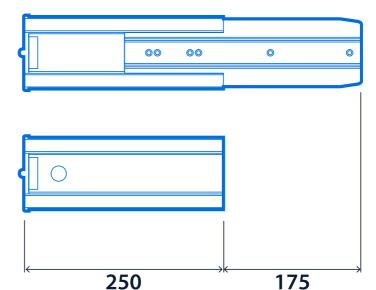

Yes



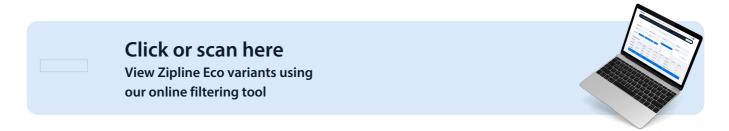

Information is correct as of 29-Dec-2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.